

General Data

Item No.	UL-1010
Power	5 Watts
LED type	1 PC 5W COB LED
Luminous flux	350~400 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	15°, 25°
Dimension	42 x 77 (mm) Diameter x Height
Cut out	/
Net weight	0.29 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC95-265V as standard (DC 12V or DC 24V as optional)
Insulation class	Class I
Cable	1PC rubber cable 1.5M H05RN-F 3x0.75mm square
Driver	Built-in high voltage constant current driver with transformer

Construction Data


IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey standard,silver color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	116*95*48 mm
Carton size	49*25*16 cm (30 PCS / carton)

Passivated


3 Years Warranty

Photometric Data (3000K, 25°) & Illumination Picture

Light Distribution Curve [Unit: cd]

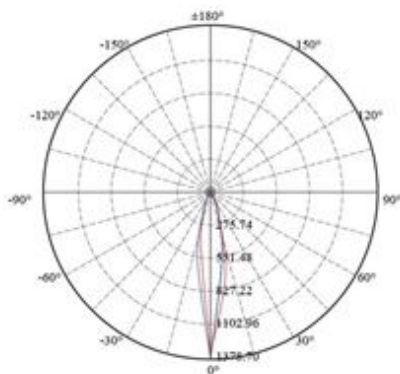

Lux distance Curve

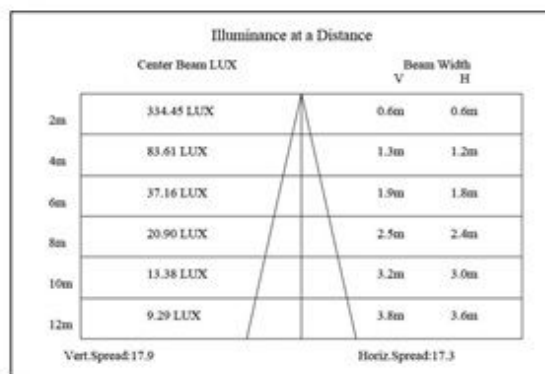

Illumination Picture



IP67 IK04